DECOSTAR 51 TITAN 35 W 12 V 60° GU5.3

DECOSTAR 51 TITAN | Halogen longlife dichroic reflector lamps 35 mm and glass panel



- General illumination
- Shops
- Restaurants, hotels and similar prestigious applications
- Offices, public buildings

Product benefits

- Brilliant accent light
- Constant bluish appearance of the light escaping at the back of the reflector
- Dichroic reflector reduces the heat in the light beam by up to 66 %
- Constant luminous intensity and constant color location throughout
- Flat clear shield
- Approved for use in open luminaires (to IEC 60598-1)
- UV filter
- Contains no mercury, can be thrown away with normal household waste

Product features

- Average life: 4,000 h
- Dimmable
- Color rendering index R_a: 100
- Base: GU5.3

© 2012, OSRAM GmbH. All rights reserved.

Technical data

Electrical data

Rated wattage	35 W
Nominal wattage	35 W
Nominal voltage	12 V
Rated power factor λ	1.00


Light technical data

Luminous intensity	700 cd
Beam angle	60 °
Color temperature	3000 K
Color rendering index Ra	100
Starting time	0.0 s
Warm-up time (60 %)	0 s
Lumen main.fact.at end of nom.life time	0.80

Dimensions & weight

Overall length	46.0 mm
Diameter	51.0 mm
Outer bulb	MR51

© 2012, OSRAM GmbH. All rights reserved.

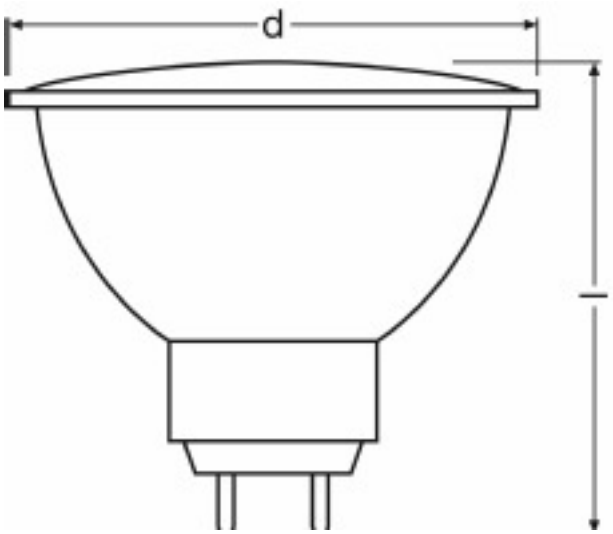

Product line drawing with letters

Colors & materials

Lamp mercury content	0.0 mg
Mercury-free	Yes

Lifespan

Nominal lamp life time	4000 h
Rated lamp life time	4000 h
Number of switching cycles	1000000 [1)]

[1)] At 1 s on / 1 s off

Additional product data

Base (standard designation)	GU5.3

© 2012, OSRAM GmbH. All rights reserved.

Capabilities

Dimmable	Yes
Burning position	Any

Country specific categorizations

ILCOS	HRGS//UB-35-12-GU5,3-51/60
UK Org	M224T
Order reference	46865 VWFL

© 2012, OSRAM GmbH. All rights reserved.

Logistical Data

Product code	Packaging unit (Pieces/Unit)	Dimensions (height x width x length)	Gross weight	Volume
4050300428734	Folding carton box 1	46 mm x 46 mm x 58 mm	38.00 g	0.12 dm^3
4050300531847	Shipping carton box 20	123 mm x 135 mm x 238 mm	836.00 g	3.95 dm^3

© 2012, OSRAM GmbH. All rights reserved.

References / Links

For light distribution curves see
- www.osram.com

Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.

© 2012, OSRAM GmbH. All rights reserved.